


# Shallow Well Total Fluid Recovery

## Geotech TFS (Total Fluids System)


The Geotech TFS is a compact total fluids pumping system designed for shallow well and sump applications with up to 25 ft. (7.6 m) of suction lift. The pump, usually mounted at the well head, will provide from 0-4 gpm (0-15 LPM) using from 2-6 cfm (.05-.17 cmm) of air, depending on the suction lift, pumping rate and total discharge head.

### FEATURES

- Pumps a wide viscosity range of fluids
- Variable speed pump
- Can be mounted in sumps – 12" (30cm) minimum
- Automatic level controls are provided to regulate the operation of the pump
- Pumps are available in a variety of sizes and configurations to pump nearly any fluid
- Optional accessories:
  - Hose
  - Air compressor
  - Filters
  - Tankfull Shut-Off Sensor
  - Well caps

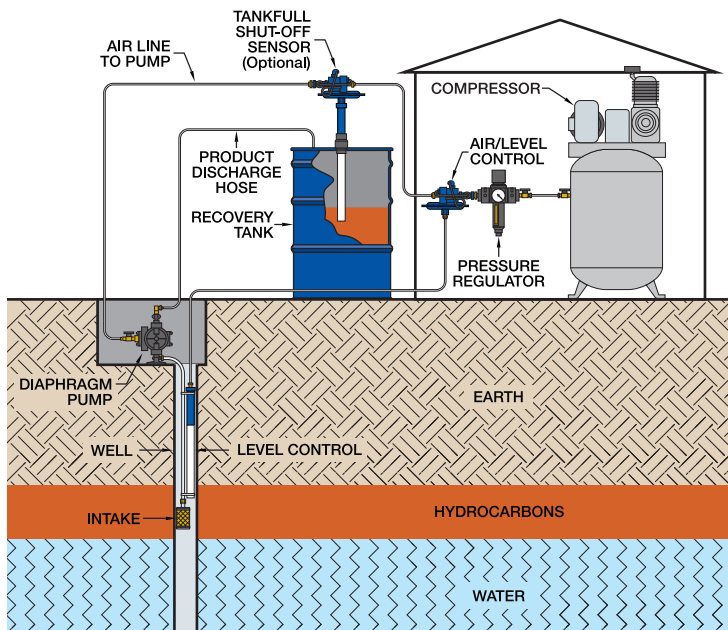

Standard Geotech TFS Configuration

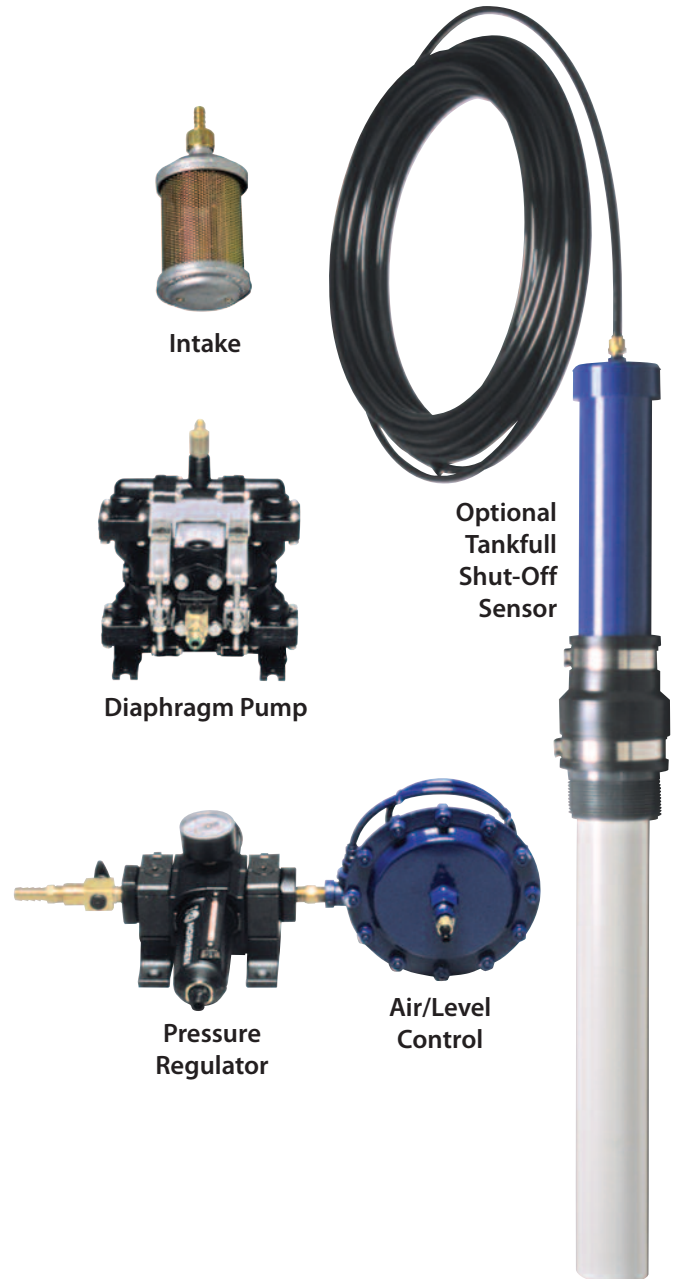

**CALL GEOTECH TODAY (800) 833-7958**

**Geotech Environmental Equipment, Inc.**

2650 East 40th Avenue • Denver, Colorado 80205

(303) 320-4764 • (800) 833-7958 • FAX (303) 322-7242

email: sales@geotechenv.com website: www.geotechenv.com